


## **PULSE**



## Give all your meters communications capability.



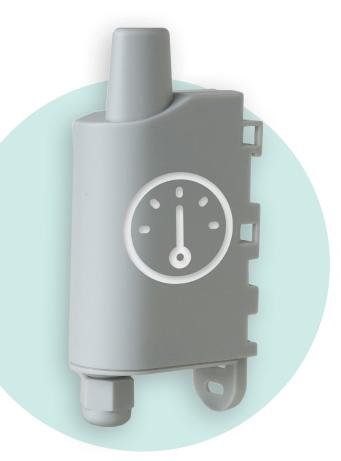





**ALERT** 

· Monitor any leaks



- Receive readings feedback from gas and power meters
- Monitor over-consumption (gas, water and electricity)





#### **FUNCTION**

Pulse-based interface

### **BENEFITS**

- · Up to 2 connectable meters
- · Detection of tampers and leaks
- · Flow rate monitoring
- · Locally and remotely configurable
- · Low power consumption for optimal autonomy







#### **PRODUCT USES**



Monitor your energy consumption on a building (water, electricity...).



Count the number of people or the traffic in a specific place.

# TECHNICAL SPECIFICATIONS

· Periodic modes with log

Soldered battery

- Dimensions: 105 x 50 x 27 mm

- Box: IP67 (IP68 on request)

· Integrated fastening system: DIN rail, tube,

wall, flange

· Configurable Life Screen

- Zone: Sigfox: RC1 / LoRaWAN: EU863-870 /

WM-Bus: 868

• Operating temperature range: -20°C to + 75°C

· Weight: 70 g

· Standards: Directive 2014/53/EU (RED)

· Alert concerning product, configuration error,

low battery

