


TEMP 2S 3

Measure temperatures together in two places.

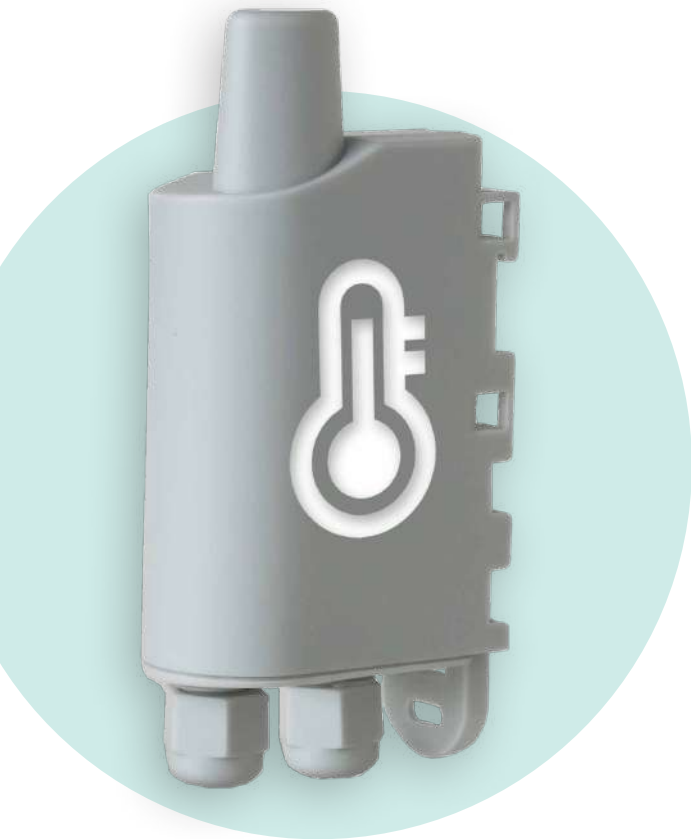

ALERT

- Provide warnings should thresholds be exceeded




MEASURE

- Monitor temperature changes



MONITOR

- Measure temperatures
- Identify temperature losses



BENEFITS

- Two remote probes
- Locally and remotely configurable
- Battery-powered stand-alone product
- Data logging for optimal autonomy
- Redundancy for better service continuity



FUNCTION

Temperature

PRODUCT USES



Monitor the flow and return temperatures of the hydraulic circuits.



Monitor the temperature in a water circuit Sanitary Hot Water (DHW) to avoid the multiplication of bacteria called Legionella causing legionellosis.

TECHNICAL SPECIFICATIONS

- T° range remote probe:
Sensor: -55 + 155°C (+/-0,1) / Wire: -30 + 105°C
- Periodic mode with or without history
 - Alarm on exceeding threshold
 - Data redundancy
 - Replaceable battery
 - Dimensions: 105 x 50 x 27 mm
 - Casing: IP67 (IP68 on request)
 - Configurable Life Screen

- Integrated fastening system: DIN rail, tube, wall, flange
- Zone: Sigfox: RC1 / LoRaWAN: EU863-870 / WM-Bus: 868 on demand (MoQ)
- Operating Temperature Range: -25 + 70°C
 - Weight: 130 g
 - Standards: Directive 2014/53/EU (RED)
- Product error alert, configuration error, low battery

