

Double level sensor


Monitor the evolution of a fluid level



- Prevent when the level goes up or goes down
- Anticipate an overflow or an empty tank

BENEFITS

- Ready-to-use solution
- Self-powered
- Emission on event (Alert)
- Double level of detection

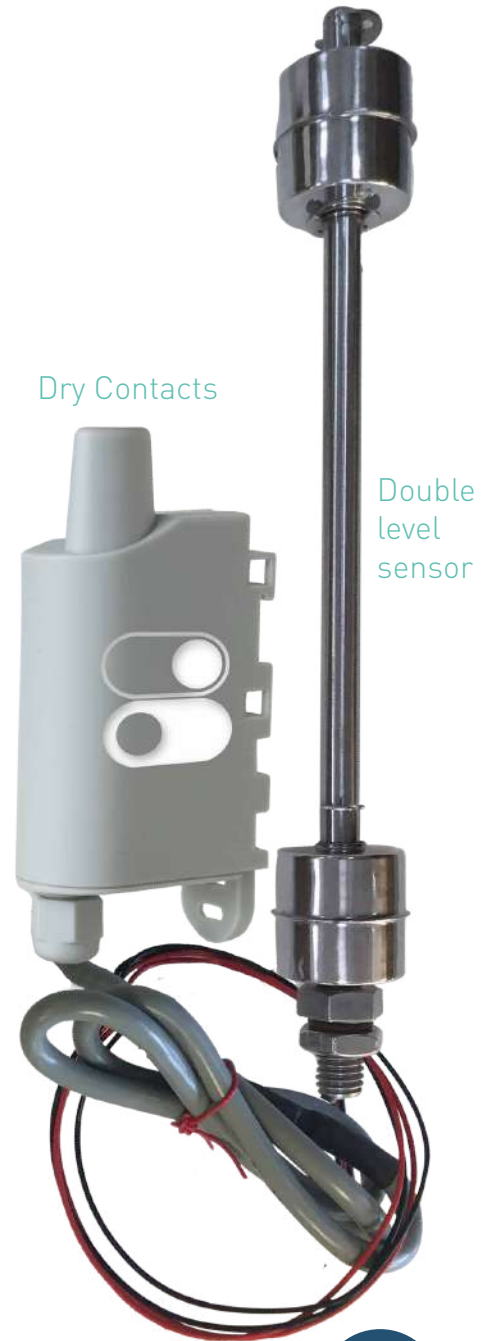

FUNCTION

Detect a fluid level



PRODUCT USES



Monitor the level of a pond (retention, evacuation) or a tank, in order to anticipate and avoid overflows.



Monitor the water level in an evacuation nozzle to avoid overflows on roads or railways ...

TECHNICAL SPECIFICATION

Double level sensor

- Operating temperature range: up to 120°C
- Dimensions: 215 mm total / 200 mm body float
 - Casing: stainless steel 304
 - About 1 m of cable
 - Working pressure: 1MPa
 - Maximal pressure: 5MPa

Dry Contacts

- Operating temperature range: -25°C to + 70°C
 - Replaceable battery
 - Dimensions: 105 x 50 x 27 mm
 - Case: IP67 (IP68 on demand)
- Area: sigfox: RC1 / LoRaWAN: EU863-870 / W-Mbus: 868